

WIDEX DREAM™ CIC WITH **TRUEISP**

4 PERFORMANCE LEVELS


440/330/220/110



The WIDEX DREAM CIC uses our unique wireless WidexLink technology and the new TRUE ISP, True-Input technology platform. Volume control and program shift via RC-DEX/M-DEX. Uses a size 10 battery.

Minimal to moderately severe hearing losses

SUGGESTED FITTING RANGE

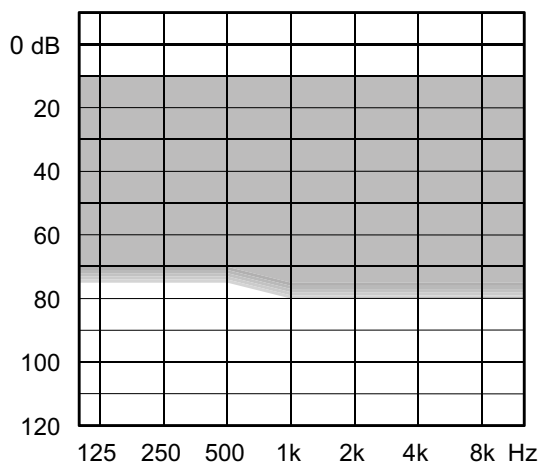

STANDARD TECHNOLOGY

- **TRUEISP**
- True-Input technology
- WidexLink - Wireless connectivity
- InterEar functionality

| KEY FEATURES | 440 | 330 | 220 | 110 |
|-----------------------------------|-------|------|-----|-----|
| Performance | xxxxx | xxxx | xxx | xx |
| Processing channels | 15 | 10 | 5 | 3 |
| TruSound Softener | X | X | | |
| Feedback cancelling (IE-InterEar) | IE | IE | IE | |
| Speech Enhancer (IE-InterEar) | IE | X | | |
| Personal Audibility Extender | X | X | X | X |
| Personal Acclimatisation | X | X | X | X |
| Number of programs* | 5 | 4 | 3 | 2 |
| Personal Zen | IE | | | |
| InterEar Partner Monitor | IE | | | |
| SmartSpeak/SmartTone | X | X | X | X |

| DEX ACCESSORIES | X | X | X | X |
|--------------------------------|---|---|---|---|
| RC-DEX, TV-DEX, M-DEX, | | | | |
| FM+DEX, PHONE-DEX ¹ | | | | |


* Plus Zen+

¹) Available in Europe

MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

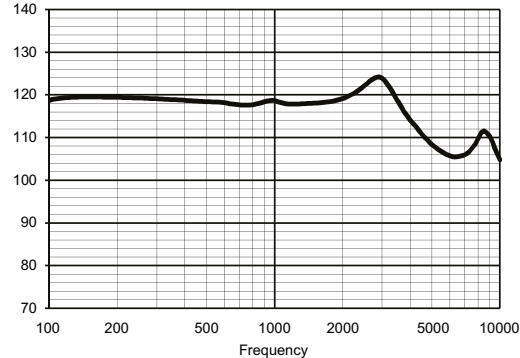

MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009


Output dB SPL

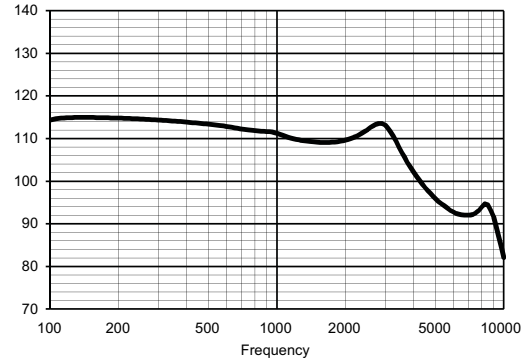

OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

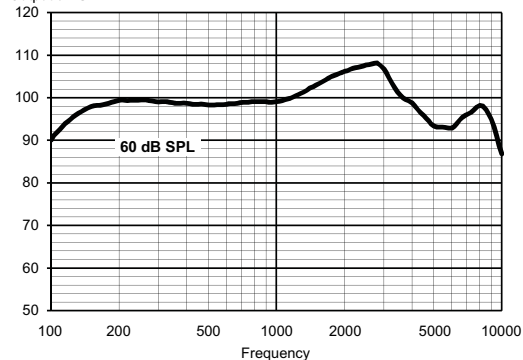

OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

Output dB SPL

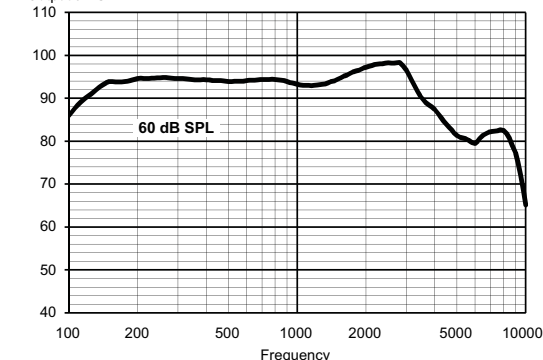

Technical data Typical data obtained through standard pure tone measurements.
Hearing aid set to Compass Test mode 1, unless stated otherwise.
Measured using a standard ITE coupler without wax guard, and with a 5 x 1.55mm tube.

| | | IEC 60118-0 | ANSI S3.22-2009 / IEC 60118-7 |
|--|---------|--------------------|-------------------------------|
| OSPL90 | 2500 Hz | 122 dB SPL | 112 dB SPL |
| | Peak | 124 dB SPL | 115 dB SPL |
| | Average | 119 dB SPL | 111 dB SPL |
| Acoustic output (Input 60 dB SPL) | 2500 Hz | 107 dB SPL | 98 dB SPL |
| | Peak | 108 dB SPL | 98 dB SPL |
| | Average | 101 dB SPL | 95 dB SPL |
| Max gain (Input 50 dB SPL, Compass Max gain test mode) | 2500 Hz | 60 dB | 50 dB |
| | Peak | 64 dB | 56 dB |
| | Average | 61 dB | 53 dB |
| Frequency range | | 100 Hz - 10000 Hz | 100 Hz - 9300 Hz |
| Harmonic distortion (Input 70 dB SPL) | 500 Hz | <2% | <2% |
| | 800 Hz | <2% | <2% |
| | 1600 Hz | <2% | <2% |
| Equivalent input noise | | 21 dB SPL | 25 dB SPL |
| Battery drain (stand by) | | 0.86 mA | 0.86 mA |
| Battery drain | | 0.88 mA | 0.90 mA |
| Battery life / hours (Type 10 Zn-Air, 90 mAh) | | 100 (>90) | 100 (>90) |
| Mobile phone immunity | | IRIL: -32/2 dB SPL | U-rating: M4 |

